



HITACHI FLORA



FLORA

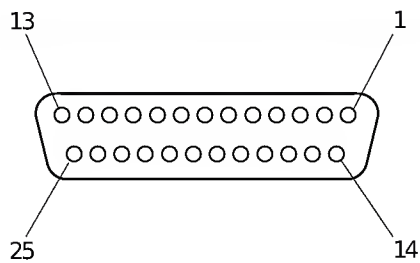


ピン	ピン名	ビット	ビット
1	STROBE-N	DATA0 1 DATA7 0 0 0 0 0 0 0	0 0 0 0
2	DATA0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 0
3	DATA1		
4	DATA2		
5	DATA3		
6	DATA4		
7	DATA5		
8	DATA6		
9	DATA7		
10	ACKLG-N	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
11	BUSY	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
12	PE	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
13	SLCT	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
14	AUTO FD-N	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
15	ERROR-N	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
16	INT-N	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0
17	SLCT1-N-N	0 0 0 0 0 0 0 DC1/DC3 0 0 0 0 0 0 0	0 0
18 25	GND	0 0 0 0 0 0 0	—

0 : 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 BCS 0 0 0 0 0 0 0 0 0 0 0 0

ヒント

0 -N 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0




Pin	Signal	Color	Level
1	R	Red	5V
2	G	Green	5V
3	B	Blue	5V
4	NC		—
5	GND	Black	—
6	R-GND	Red	—
7	G-GND	Green	—
8	B-GND	Blue	—
9	+5V	Yellow	5V
10	GND	Black	—
11	NC		—
12	SDA	White	5V
13	HSYNC	White	5V
14	VSYNC	White	5V
15	SCL	White	5V

ヒント

0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0




DM 111111

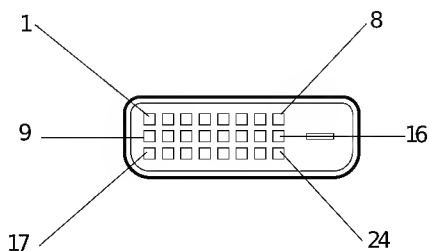


Pin	Signal	Signal
1	T.M.D.S. Data2-	T.M.D.S. 2-
2	T.M.D.S. Data2+	T.M.D.S. 2+
3	T.M.D.S. Data2 SHIELD	T.M.D.S. 2 SHIELD
4	Reserve	
5	Reserve	
6	DDC Clock	DDC
7	DDC Data	DDC
8	No Connect	
9	T.M.D.S. Data1-	T.M.D.S. 1-
10	T.M.D.S. Data1+	T.M.D.S. 1+
11	T.M.D.S. Data1 SHIELD	T.M.D.S. 1 SHIELD
12	Reserve	
13	Reserve	
14	+5V Power	+5V
15	Ground(for +5V)	(+5V)
16	Hot Plug Detect	
17	T.M.D.S. Data0-	T.M.D.S. 0-
18	T.M.D.S. Data0+	T.M.D.S. 0+
19	T.M.D.S. Data0 SHIELD	T.M.D.S. 0 SHIELD
20	Reserve	
21	Reserve	
22	T.M.D.S. Clock SHIELD	T.M.D.S. Clock SHIELD
23	T.M.D.S. Clock+	T.M.D.S. Clock +
24	T.M.D.S. Clock-	T.M.D.S. Clock -

DFP

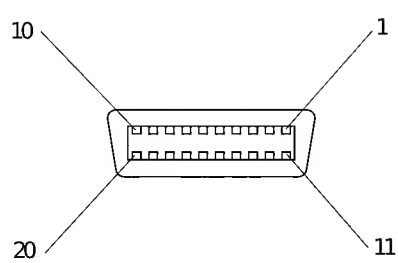

Pin	Signal	Function	Notes
1	TX1 +	TMS (G) 00000000	00
2	TX1 -	TMS (G) 000000 -0	00
3	TX1 SHIELD	TMS 0000	—
4	TXC SHIELD	TMS 0000	—
5	TXC +	TMS 000000000000	00
6	TXC -	TMS 0000000000 -0	00
7	GND	DDC 000 GND	—
8	+5VDC	DDC 000 +5V	00
9	Reserved	00	—
10	Reserved	00	—
11	TX2 +	TMS (R) 00000000	00
12	TX2 -	TMS (R) 000000 -0	00
13	TX2 SHIELD	TMS 0000	—
14	TX0 SHIELD	TMS 0000	—
15	TX0 +	TMS (B) 00000000	00
16	TX0 -	TMS (B) 000000 -0	00
17	Reserved	00	—
18	SENSE	0000000000	00
19	DDC / SDA	DDC 000	000
20	DDC / SCL	DDC 000	00


USB



Pin	Signal	Color	Notes
1	+5V	Blue	
2	DATA-	White	
3	DATA+	Green	
4	GND	Red	

ヒント


USB Universal Serial Bus




Pin	Signal	Color	Notes
1	DCD	Blue	
2	RD	White	
3	TD	Green	
4	DTR	Red	
5	GND	Black	
6	DSR	Yellow	
7	RTS	Purple	
8	CTS	Brown	
9	RI	Pink	

ヒント


RS-232C



Pin	Signal	Width (mm)	Height (mm)
1	DATA (K/B)	0.127	0.127
2	NC	0.127	—
3	GND	0.127	—
4	+5V *	0.127	0.127
5	Clock (K/B)	0.127	0.127
6	NC	0.127	—




Pin	Signal	Width (mm)	Height (mm)
1	DATA (M5)	0.127	0.127
2	NC	0.127	—
3	GND	0.127	—
4	+5V	0.127	0.127
5	Clock (M5)	0.127	0.127
6	NC	0.127	—




Pin	Signal	Color	Notes
1	DATA (M)	Blue	
2	DATA (K)	Orange	
3	GND	Green	
4	+5V	Red	
5	Clock (M)	Blue	
6	Clock (K)	Orange	

LAN



Pin	Signal	Color	Notes
1	TD+	Blue	
2	TD-	Orange	
3	RD+	Blue	
4	GND	Green	
5	GND	Blue	
6	RD-	Orange	
7	GND		
8	GND		



□ □	□ □ □	□ □
1	GD	—
2	GD	—
3	Y□ □	□ □
4	C□ □	□ □
5	□ □	—
6	□ □	—
7	□ □ □ □ □ □ □	□ □